


- 3-step charge control with current detection
- Universal input voltage (90-264 VAC)
- Wake up and low current start-up of deeply discharged batteries
- Error indication for reverse polarity, short circuit, charging battery packs with wrong number of cells and safety timer run-out
- With NTC input on request
- Order plugs and mains cord separately
- ECO-design compliance: DoE and CEC



Approvals:

- Home Healthcare EN 60601-1-11
- Household safety, EN 60335-1 & -2-29 (1c to 10c)
- Medically certified
- Safety: EN 60601-1 ed. 3.1
- EMC: EN 60601-1-2 ed. 4
- UL approved

For updates: see www.mascot.no



TECHNICAL SPECIFICATIONS

GENERAL INPUT/OUTPUT

| | |
|--|----------------------------------|
| Input voltage: | 90-264 VAC |
| Line Frequency: | 47 – 63Hz |
| Switch frequency, approx.: | 40 kHz |
| Leakage current from batt. with mains switched off: | <0,4mA @ nominal battery voltage |
| Temperature range | |
| • Operating: | -25 °C - +40 °C |
| • Storage: | -25 °C - +85 °C |
| Ripple: | < 100 mV p-p |
| Dimensions (LxWxH): | 124 x 50 x 37 mm |
| Weight: | 220g |


SAFETY PROTECTION EMC

| | |
|-------------------------------|--|
| Protection: | Protected against reversed polarity and short circuit proof Class II |
| Insulation class: | Class II |
| Insulation voltage | |
| Primary – secondary: | 4000VAC / 5700VDC |
| Electrical safety std: | EN/IEC 60335-2-29, EN/IEC/ANSI 60601-1, EN 60601-1-11 |
| EMC standards | |
| • Medical | EN 60601-1-2 |
| • Emission | EN 55014-1, EN 61000-6-3 |
| • Immunity | EN 55014-2, EN 61000-6-1 |
| Input terminal: | 2-pin IEC 60320 connector C8 |
| Output terminals: | DC connector, battery clips, push on terminals or open ends 4X |
| IP-code: | 4X |

VERSIONS

| CHARGE CONTROL | | Step 0 < 10min (yellow) | Step 0 > 10min (Red: 4 blinks) | Step 1 (yellow) | Step 2 (Flash yellow) | Step 3 (green) | |
|----------------|----------------------|--|--------------------------------|-----------------|-----------------------|------------------------------|---------|
| Cells | Max output power (W) | Low Current start-up for deeply discharged batt. | Battery voltage too low | Charge Current | Charge Voltage | Charge term when current is: | Restart |
| 1 | 10,5W | CC 100mA±25mA when batt. < 3V | 0A/0V | 2.5A ±0.3A | 4.2V ±0.05V | < 100mA or max. 1 hr. | 4.1V |
| 2 | 21W | CC 100mA±25mA when batt. < 6V | | 2.5A ±0.3A | 8.4V ±0.1V | | 8.2V |
| 3 | 28W | CC 100mA±25mA when batt. < 9V | | 2.2A ±0.2A | 12.6V ±0.1V | | 12.3V |
| 4 | 28W | CC 100mA±25mA when batt. < 12V | | 1.6A ±0.15A | 16.8V ±0.1V | | 16.4V |
| 7 | 29W | CC 100mA±25mA when batt. < 21V | | 1.0A ±0.1A | 29.4V ±0.2V | | 28.7V |
| 10 | 29W | CC 100mA±25mA when batt. < 30V | | 0.7A ±0.07A | 42V ±0.3V | | 41V |

Charging characteristics and LED indication *

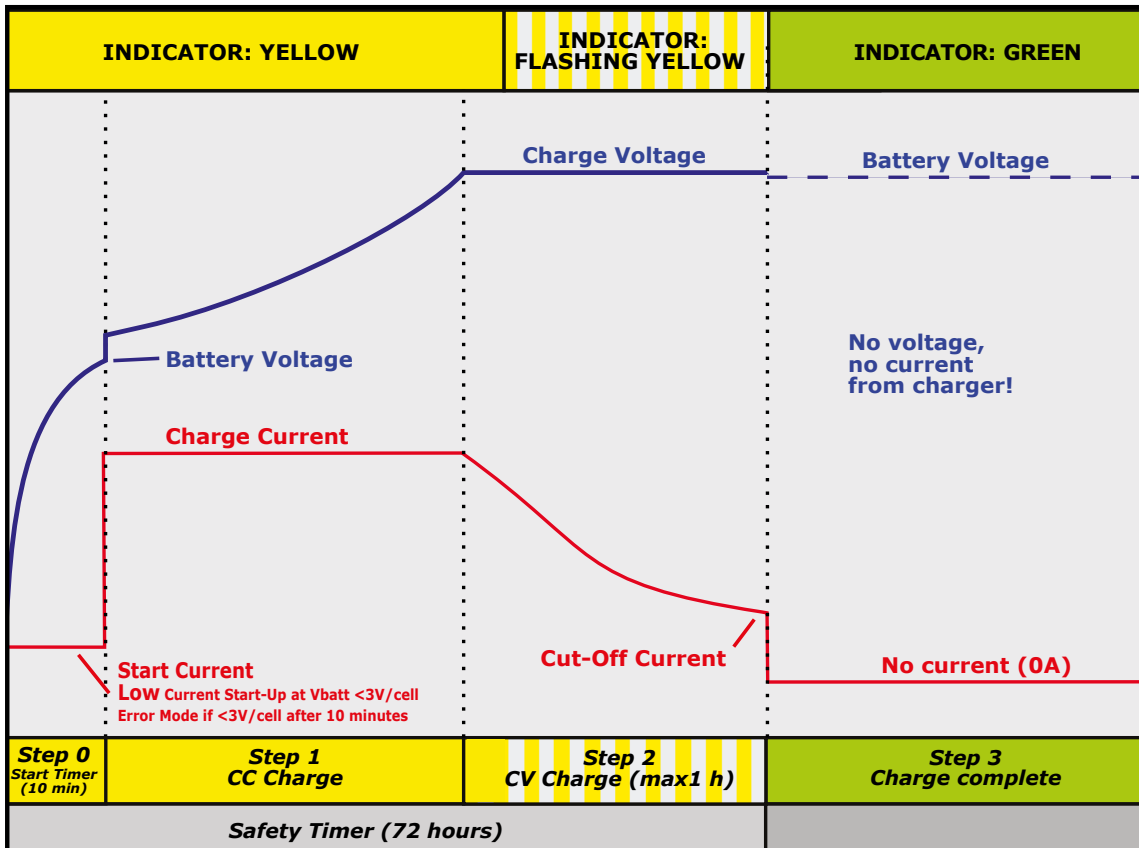

* an animated video of this charging progress is available on our website

BATTERY NOT CONNECTED INDICATIONS


Battery not connected is indicated by FLASHING GREEN. In this mode charger will apply short pulses attempting to wake up deeply discharged batteries.

ERROR INDICATIONS

- 2 red blinks: Battery is connected to charger with wrong polarity!
- 3 red blinks: Charger output is shorted. Check output cable connection!
- 4 red blinks: Battery voltage is low. Check battery status or voltage.
- 5 red blinks: Safety timer has run out. Check battery status or capacity.
- LED off: Battery voltage is too high. Check battery voltage.

WAIT MODE INDICATIONS


- Yellow with 1 red blink: Battery temperature is too low ($< 0^{\circ}C$)
- Yellow with 2 red blink: Battery temperature is too high ($> 45^{\circ}C$)



Exchangeable AC plugs


EU plug adapter

Part no. 127000
Weight: 20,9 g




US plug adapter

Part no. 127100
Weight: 13,4 g




UK plug adapter

Part no. 127200
Weight: 29,2 g



AUS plug adapter

Part no. 127300
Weight: 21,4 g



2-pin IEC 60320 C7 mains cord
1800 mm
EU part no. 131306, UK part no. 131148,
US part no. 131368, AU part no. 013108

