


Product Datasheet

Alkaline

Powerline



LR20AD

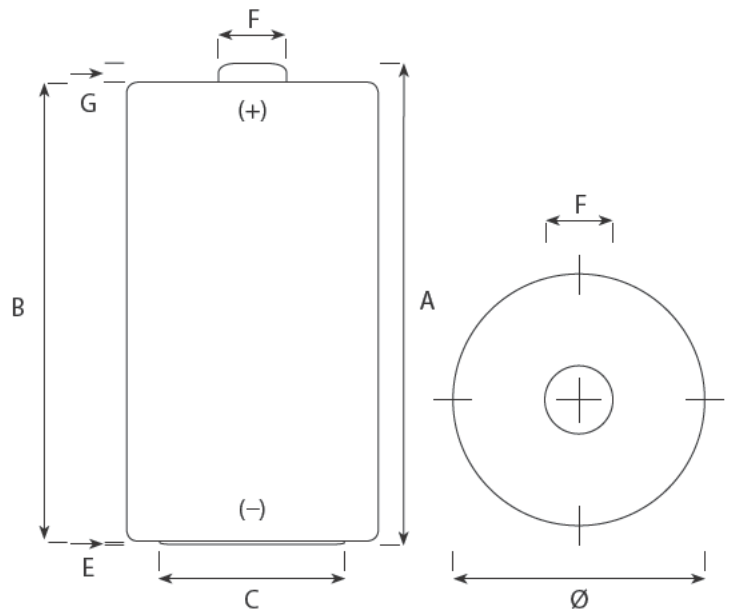

| IEC Dimensions (mm) | | |
|---------------------|---------|---------|
| Dimension | Maximum | Minimum |
| A | 61,5 | — |
| B | — | 59,5 |
| C | — | 18,0 |
| E | 1,0 | — |
| F | 9,5 | — |
| G | — | 1,5 |
| Ø | 34,2 | 32,3 |

Specifications

| | |
|------------------------------------|---|
| Name | LR20 / XL / D / AM1 / MONO / MN1300 / 13A / 13AC |
| Made in | Belgium |
| Type | Alkaline Foil |
| Nominal Voltage | 1,5 Volt |
| Electrolyte | Potassium Hydroxide |
| Average weight | 140 g |
| Storage temp. range | +10°C (50°F) ~ +25°C (77°F) |
| Operating temp. range | -20°C (-4°F) ~ +55°C (131°F) |
| Average Impedance | +/- 90 m-Ohm @ 1kHz fresh |
| Heavy metals | No added mercury (Hg), Cadmium (Cd) or Lead (Pb) |
| Compliant to | IEC 60086-1, IEC 60086-2, IEC 60086-5 non dangerous goods regulation EU directive 2006/66/EC Nordic Ecolabel |
| Recommended cut off voltage | 0,8V per cell (0,9V per cell for multi series usage) |

For more information:

www.panasonic-batteries.com

Panasonic

Typical discharge values

LR20AD

