



Battery Spec--H--SC3000mAh

| Single Specification          |                 |                                                              |
|-------------------------------|-----------------|--------------------------------------------------------------|
| Product Name                  |                 | Sealed Nickel Metal Hydride Cylindrical Rechargeable Battery |
| Model                         |                 | H-SC3000mAh                                                  |
| Nominal Voltage               |                 | 1.2V                                                         |
| Nominal Capacity              |                 | 3000mAh                                                      |
| Minimum Capacity              |                 | 2850mAh                                                      |
| Dimension (with tube)         | Diameter        | $23.0^{+0}_{-1.0}$                                           |
|                               | Height          | $43.0^{+0}_{-1.0}$                                           |
| Internal Resistance at 1000Hz |                 | $\leq 20m\Omega$ (After charge)                              |
| Charge                        | Standard        | 300mA X 16h                                                  |
|                               | Rapid           | 900mA X 4.0h                                                 |
|                               | Trickle         | 90~150mA                                                     |
| Discharge Cut-off Voltage     |                 | 1.0V                                                         |
| Cycle Life                    |                 | $\geq 500$ Cycles                                            |
| Ambient Temperature           | Standard Charge | 0°C to 45°C                                                  |
|                               | Rapid Charge    | 10°C to 40°C                                                 |
|                               | Trickle Charge  | 0°C to 45°C                                                  |
|                               | Discharge       | -20°C to 50°C                                                |
|                               | Storage         | -20°C to 45°C                                                |
| Ambient Humidity              |                 | 65 $\pm$ 20%                                                 |

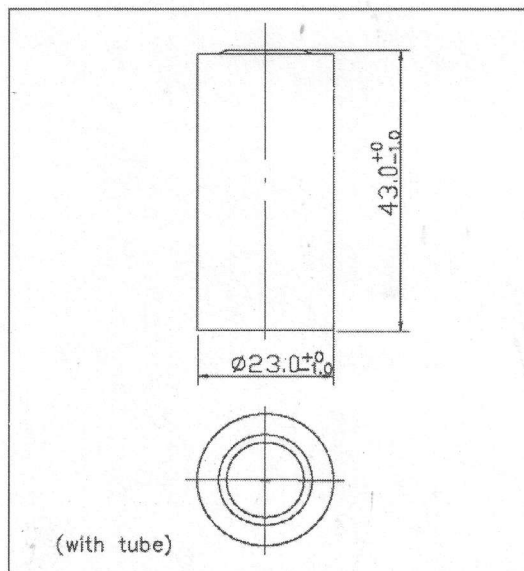


## General Characteristics

Standard charge

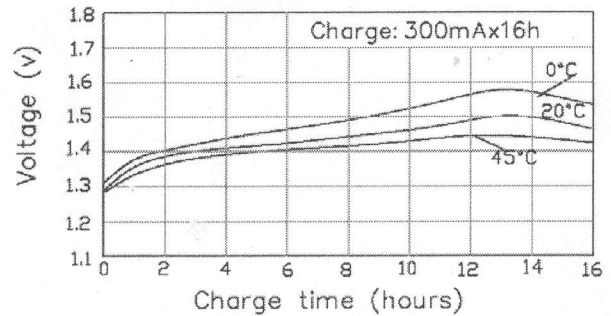

Rapid charge

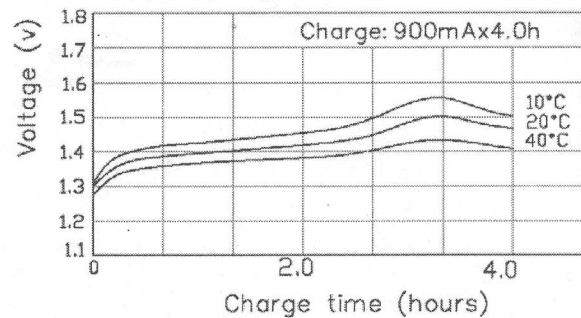

Discharge

