


TECHNICAL DATA

Voltage	12.00 V
Performance	12Ah C20 1.75V/cell 25°C
Float Voltage	2,27V/cell at 20°C
Connection torque	na
Max Charge Current	3.00 A
Weight (Typical)	4.0 KG

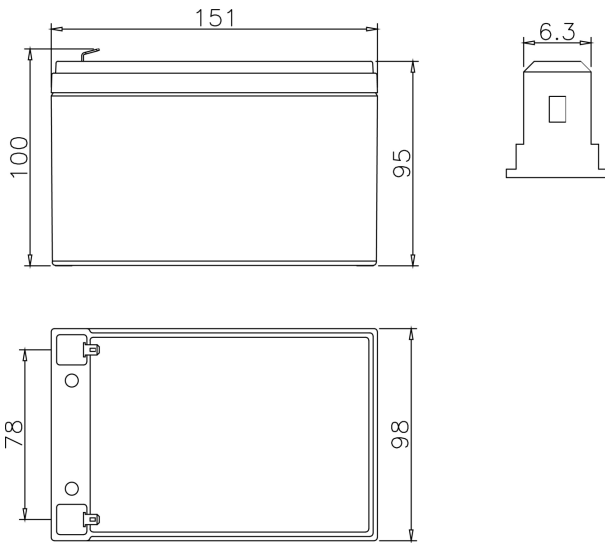

ELECTRICAL PERFORMANCES - Including Fiamm connection voltage drop

Constant Current Discharge Table [A] at 20°C

V / cell	5 min	10 min	15 min	30 min	45 min	1 h	2 h	3 h	4 h	5 h	6 h	8 h	10 h
1,60	46,4	31,7	23,6	13,4	9,42	6,93	3,74	2,63		1,72			1,10
1,65	46,0	31,3	23,4	13,3	9,36	6,88	3,71	2,61		1,71			1,08
1,67	45,7	31,2	23,2	13,3	9,33	6,85	3,69	2,60		1,70			1,07
1,70	45,3	30,8	22,9	13,2	9,27	6,80	3,65	2,58		1,69			1,06
1,75	44,5	30,2	22,3	12,9	9,12	6,69	3,57	2,53		1,66			1,05
1,80	43,1	29,3	21,6	12,6	8,95	6,56	3,51	2,43		1,58			1,04
1,85													
1,90													

Constant Power Discharge Table [W/cell] at 25°C

V / cell	5 min	10 min	15 min	30 min	45 min	1 h	2 h	3 h	4 h	5 h	6 h	8 h	10 h
1,60	81,1	56,9	43,3	25,6	18,3	13,6	7,46	5,29		3,42			2,17
1,65	80,7	56,6	43,1	25,5	18,3	13,6	7,43	5,27		3,41			2,15
1,67	80,4	56,4	42,9	25,5	18,2	13,5	7,40	5,25		3,40			2,13
1,70	79,8	55,9	42,4	25,3	18,1	13,5	7,33	5,22		3,38			2,13
1,75	78,5	55,0	41,5	25,0	17,9	13,3	7,20	5,14		3,35			2,12
1,80	76,6	53,5	40,4	24,5	17,7	13,1	7,11	4,97		3,19			2,12
1,85	56,2	41,4	32,7	20,6	15,4	12,4	7,03	5,13		3,34			1,87
1,90													